




ESTROPOS

Tabela de cargas de trabalho de estropos conforme directiva europeia 98/37/CE Cabo galvanizado com alma de aço - resistência de 1770N/mm².

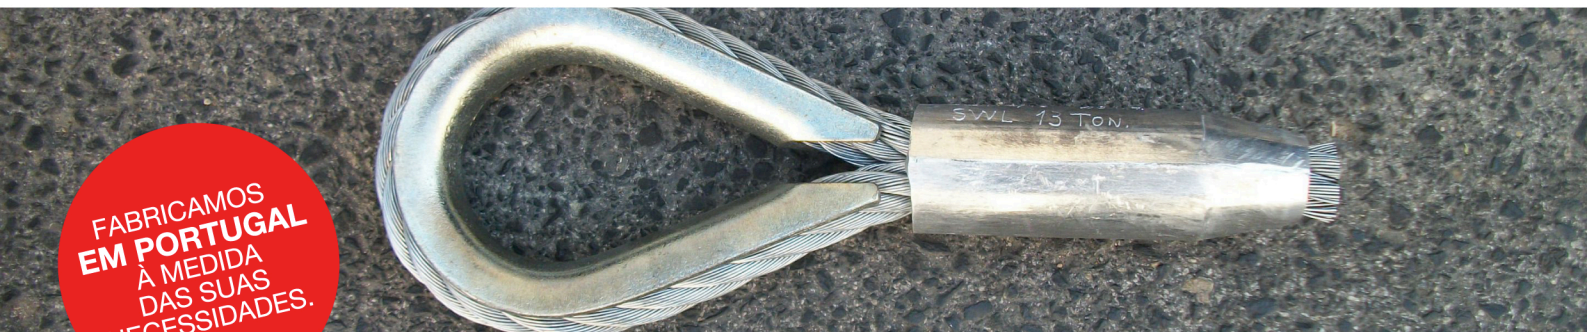

FABRICAMOS
EM PORTUGAL
A MEDIDA
DAS SUAS
NECESSIDADES.

cargas de trabalho - (swl) - ton. Coeficiente de segurança 5:1

Ø mm	0°	0° < b < 45°	45° < b < 60°	0° < b < 45°	45° < b < 60°	0°
		2 pernadas		3 e 4 pernadas		sem fim
6	0,46	0,64	0,46	0,97	0,69	0,74
8	0,75	1,05	0,75	1,55	1,10	1,20
9	0,95	1,30	0,95	2,00	1,40	1,50
10	1,15	1,60	1,15	2,40	1,70	1,85
11	1,40	2,00	1,40	3,00	2,12	2,25
12	1,70	2,30	1,70	3,55	2,50	2,70
13	2,00	2,80	2,00	4,15	3,00	3,15
14	2,25	3,15	2,25	4,80	3,40	3,70
16	3,00	4,20	3,00	6,30	4,50	4,80
18	3,70	5,20	3,70	7,80	5,65	6,00
20	4,60	6,50	4,60	9,80	6,90	7,35
22	5,65	7,80	5,65	11,8	8,40	9,00
24	6,70	9,40	6,70	14,0	10,0	10,6
26	7,80	11,0	7,80	16,5	11,5	12,5
28	9,00	12,5	9,00	19,0	13,5	14,5
30	10,5	14,7	10,5	22,0	15,8	16,8
32	11,8	16,5	11,8	25,0	17,5	19,0
34	14,0	20,0	14,0	29,0	21,0	22,0
36	15,0	21,0	15,0	31,5	22,5	23,5
38	17,0	24,0	17,0	36,0	26,0	27,0
40	18,5	26,0	18,5	39,0	28,0	30,0
42	21,0	30,0	21,5	45,0	32,0	34,0
44	22,5	31,5	22,5	47,0	33,5	36,0
46	25,5	35,5	25,5	54,0	38,5	41,0
48	26,0	37,0	26,0	55,0	40,0	42,0
50	30,0	42,0	30,0	63,0	45,0	48,0
52	31,5	44,0	31,5	66,0	47,0	50,0
54	34,5	48,3	34,5	72,0	51,5	55,0
56	36,0	50,0	36,0	76,0	54,0	58,0
60	42,0	58,0	42,0	88,0	63,0	67,0
Factor	1	1,4	1	2,1	1,5	1,6