




ESTROPOS

Tabela de cargas de trabalho de estropos conforme directiva europeia 98/37/CE Cabo galvanizado com alma de fibra - resistência de 1770N/mm².

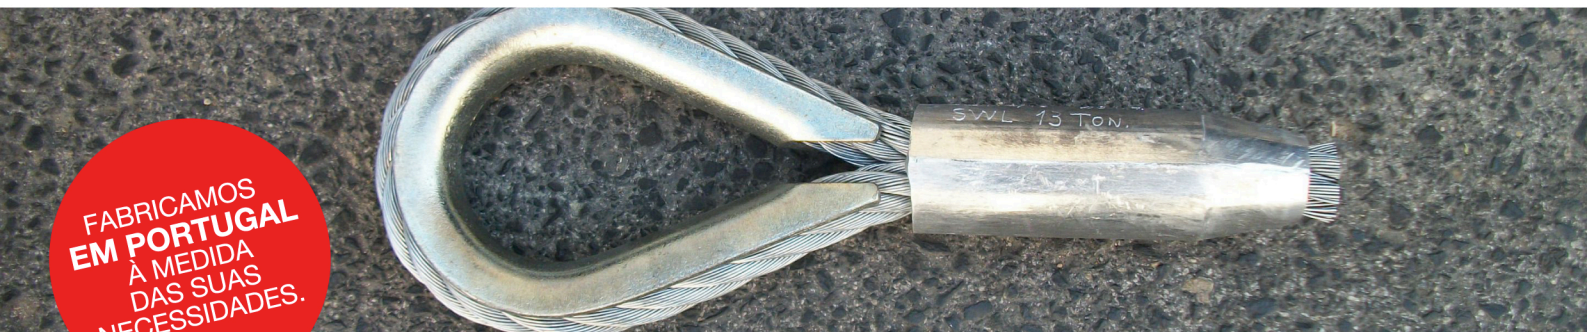

FABRICAMOS EM PORTUGAL À MEDIDA DAS SUAS NECESSIDADES.

cargas de trabalho - (swl) - ton. Coeficiente de segurança 5:1

Ø mm	0°	0° < b < 45°	45° < b < 60°	0° < b < 45°	45° < b < 60°	0°
		2 pernadas		3 e 4 pernadas		sem fim
6	0,35	0,49	0,35	0,70	0,53	0,56
8	0,70	0,95	0,70	1,50	1,05	1,10
9	0,85	1,20	0,85	1,80	1,30	1,40
10	1,05	1,50	1,05	2,25	1,60	1,70
11	1,30	1,80	1,30	2,70	1,95	2,12
12	1,55	2,12	1,55	3,30	2,30	2,50
13	1,80	2,50	1,80	3,85	2,70	2,90
14	2,12	3,00	2,12	4,35	3,15	3,30
16	2,70	3,85	2,70	5,65	4,20	4,35
18	3,40	4,80	3,40	7,20	5,20	5,65
20	4,35	6,00	4,35	9,00	6,50	6,90
22	5,20	7,20	5,20	11,0	7,80	8,40
24	6,30	8,80	6,30	13,5	9,40	10,0
26	7,20	10,0	7,20	15,0	11,0	11,8
28	8,40	11,8	8,40	18,0	12,5	13,5
30	9,70	13,6	9,70	20,4	14,6	15,5
32	11,0	15,0	11,0	23,5	16,5	18,0
34	13,0	18,2	13,0	27,3	19,5	20,8
36	14,0	19,0	14,0	29,0	21,0	22,5
38	16,0	22,4	16,0	33,6	24,0	25,6
40	17,0	23,5	17,0	36,0	26,0	28,0
42	20,0	28,0	20,0	42,0	30,0	32,0
44	21,0	29,0	21,0	44,0	31,5	33,5
46	24,0	34,0	24,0	50,0	36,0	38,0
48	25,0	35,0	25,0	52,0	37,0	40,0
50	28,0	39,0	28,0	59,0	42,0	45,0
52	29,0	40,0	29,0	62,0	44,0	47,0
54	32,5	45,5	32,5	68,0	49,0	52,0
56	33,5	47,0	33,5	71,0	50,0	54,0
60	39,0	54,0	39,0	81,0	58,0	63,0
Factor	1	1,4	1	2,1	1,5	1,6